



**Powerology**

**RICHMOND**

**10000mAh MagSafe Power Bank**

SKU: PPBCHA105BK

# **Table of Contents**

Product Overview	2
Specifications	2
Product Components	3
Compatibility Features	4
Button Functions	5
Charging Instructions	6
Safety Precautions	7
FCC Statement	8
Disposal	9
Warranty	10
Contact Us	10

## Product Overview


The Powerology Richmond 10000mAh MagSafe Power Bank is a portable charging solution designed to deliver efficient and fast charging for a variety of devices. It features a sleek, compact design with a digital display, showcasing the power status of the device. The power bank supports PD 35W for quick charging and is compatible with MagSafe, offering easy attachment for Apple devices. With a USB-C input and output, it allows for versatile charging options, including multi-device charging capabilities. The power bank also comes with a 65cm retractable USB-C cable, ensuring convenience for on-the-go charging. Ideal for users looking for a reliable, high-performance power bank, the Powerology Richmond is a perfect fit for fast, efficient, and hassle-free charging.


## Specifications

Material	PC + Zinc Alloy
Battery Capacity	10000mAh
USB-C Input	5V/3A, 9V/2.22A, 12V/1.67A, PD 20W Max
USB-C Cable Input	5V/3A, 9V/2.22A, 12V/1.67A, PD 20W Max
USB-C Output	5V/3A, 9V/3A, 12V/2.91A, 15V/2.33A, 20V/1.75A, PD 35W Max
USB-C Cable Output	5V/3A, 9V/3A, 12V/2.91A, 15V/2.33A, 20V/1.75A, PD 35W Max

Phone Wireless Output	5W, 7.5W, 10W, 15W
Watch Wireless Output	2.5W
Earbuds Wireless Output	5W
Total Output	5V/3A, 15W Max
Retractable Cable	65cm USB-C Cable
Product Weight	240g
Product Size	25 x 64 x 106.4mm
Model Number	PPBCHA105


## Product Components

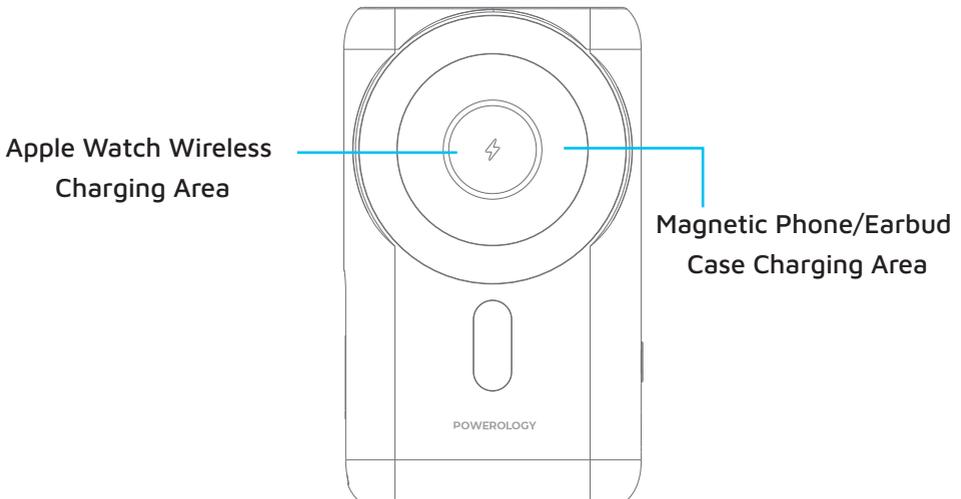


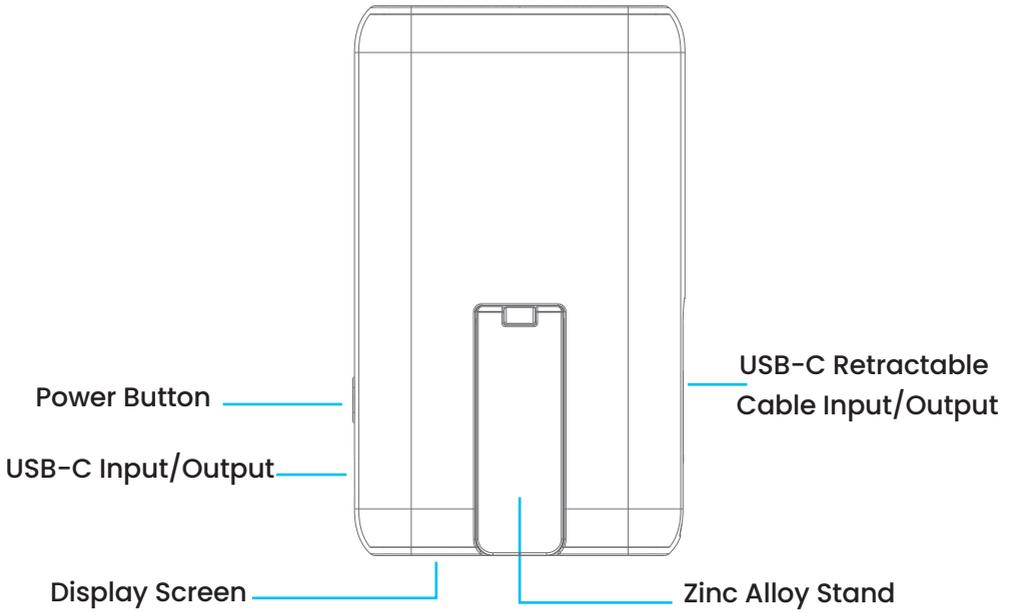

## Compatibility Features

The product is compatible with magnetic mobile phones, Apple/Huawei smartwatches, TWS earbud cases for wireless charging, USB-C PD fast charging for both input and output, and USB-C retractable cables for PD fast charging input and output.

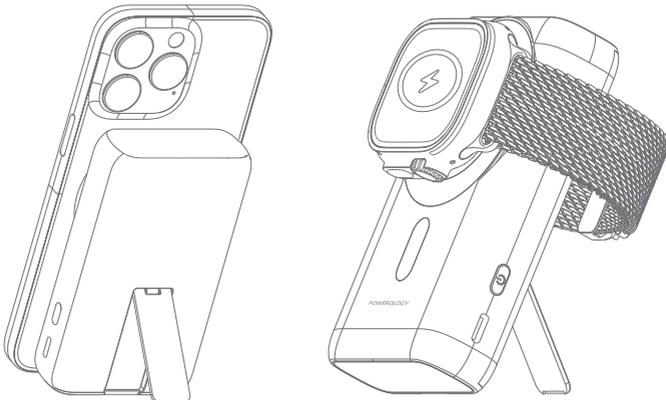

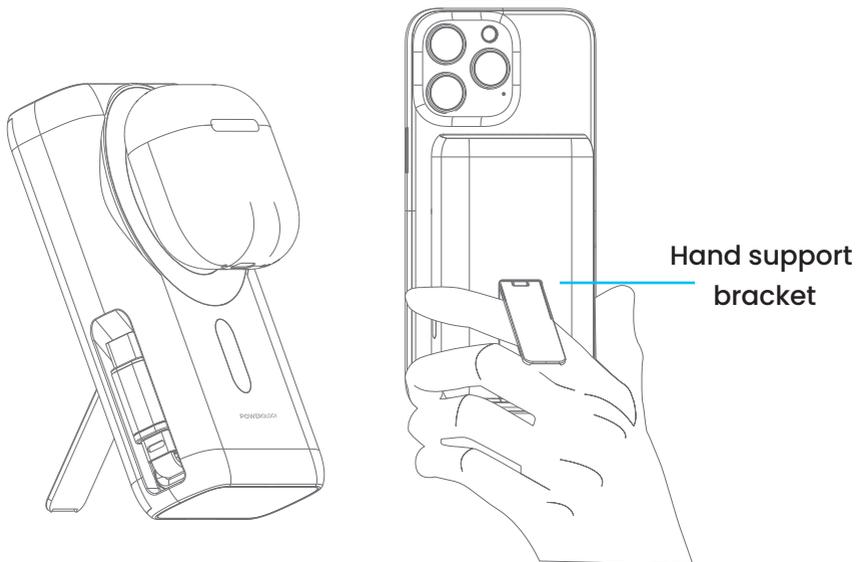

**Note:** When using more than two ports (including wireless charging) simultaneously for input/output, the output will automatically switch off fast charging mode (9V/12V/15V/20V) and enter 5V voltage output mode (wireless charging will automatically switch to 5W).

## Button Functions

1. When the device enters standby mode, press the button once (within 0.5 seconds). The display screen will show the current power level, and the light will stay on for 40 seconds before entering standby mode again.
2. When the mobile phone is charged, and the power bank's battery level reaches 0%, the power bank will automatically shut down, and the display screen will turn off.
3. Double-click the button: When the device is powered on, the wireless charging function will be turned off.

## Charging Instructions

- 1.** To extend the service life of the USB-C retractable cable, avoid pulling the cable to its full length during use, and do not pull it forcefully if it has already been stretched to the end. This helps prevent damage to the module and ensures proper retracting function of the cable.
- 2.** The wireless charging function will automatically activate when a phone contacts the product (double-clicking the button will deactivate wireless charging). Replacing the phone or single-clicking the button will activate wireless charging. When wireless charging is initiated, whether with the same phone or using wired charging for another device, wireless charging will automatically shut off (to prevent simultaneous fast charging of the same device via both wireless and wired methods). In this case, only wired charging will be available for the phone. If you wish to charge multiple phones at once, simply click the button to start wireless charging.
- 3.** When the charger is plugged in to charge the power supply, the display screen shows the power level with the percentage number increasing incrementally.
- 4.** After the power supply is fully charged, the number on the display screen will be 100 %, indicating that it is fully charged.
- 5.** The charger can only charge the device normally when its output voltage is between 5V and 12V.
- 6.** When charging the power supply, do not use an adapter with an output of 5V/1A (5W) or lower. It is recommended to use a fast charger supporting (9V/12V/15V/20V)  $\geq 30W$ .

## Safety Precautions

- 1.** Do not disassemble or modify this product yourself.
- 2.** Improper use of the power supply may damage the battery and the equipment using this power supply.
- 3.** High temperatures will reduce charging speed and limit power, which is a common phenomenon in all wireless chargers. It is recommended to charge your device in an environment where the temperature is below 25°C/77°F.
- 4.** During use, it is normal for the product temperature to be slightly higher than room temperature. It is recommended that the contact time with the product be less than 10 seconds.
- 5.** Do not store this product in a humid environment.
- 6.** Do not place this product near a heat source or charge it near a heat source.
- 7.** If the battery of this product swells, please stop charging or using it.
- 8.** Do not allow water or other liquids to flow into the interface of this product, as this may cause damage. Do not use the product after it gets wet.
- 9.** This power pack contains organic combustibles. Improper use of the power supply may cause cracking, liquid leakage, overheating, etc., resulting in permanent damage to the battery. The power supply has a built-in safety protection device.
- 10.** Do not collide with or drop the power supply, as this may cause a short circuit.
- 11.** Do not use the power supply near fire, stoves, or places with a temperature higher than 60°C, as high temperatures can melt the plastic casing.
- 12.** If the power supply is placed in water, its safety protection parameters and indicators will be damaged, making the power

supply unable to function normally. Continuing to use the power supply may cause overheating, fire, or explosion.

**13.** Do not use heavy objects or other items to squeeze the power supply and deform it.

**14.** Using non-standard chargers or modifying the parameters of specified chargers may cause the battery to overheat, burn, or explode.

**15.** If any potential safety hazard or other problems are found in the power supply, stop using it immediately.

**16.** Before using wireless charging, ensure that there are no metal foreign objects between the mobile phone (including the phone case) and the wireless charger.

**17.** If consumers use a power adapter for the power supply, they should purchase a power adapter that is used with the product, has obtained CCC certification, and meets the standard requirements.

## **FCC Statement**

**1.** This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

**(1)** This device may not cause harmful interference; and

**(2)** This device must accept any interference received, including interference that may cause undesired operation.

**2.** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for assistance.

RF warning statement:

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

## **Disposal**

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



## **Warranty**

Products that you buy directly from our **Powerology** website or shop come with a 12-month warranty.

The 12-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website <https://www.powerology.me/warranty> and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 12-month warranty period.

For more info, please check:

<https://www.powerology.me/warranty>

## **Contact Us**

If you have any questions about this Privacy Policy, please contact us at: [hey@powerology.me](mailto:hey@powerology.me)

Website: <https://www.powerology.me/>

Instagram: [powerology\\_official](https://www.instagram.com/powerology_official)

Facebook: [powerology.ME](https://www.facebook.com/powerology.ME)