



Powerology


**×5 10000 mAh Power Bank
Station**

SKU: PPBCHA48

Table of Contents

Schematic View	2
Specifications	2
Charging the Power Bank	3
Charging Devices	3
Features	4
Warnings	4
Disposal	6
Warranty	7
Contact Us	7

Schematic View

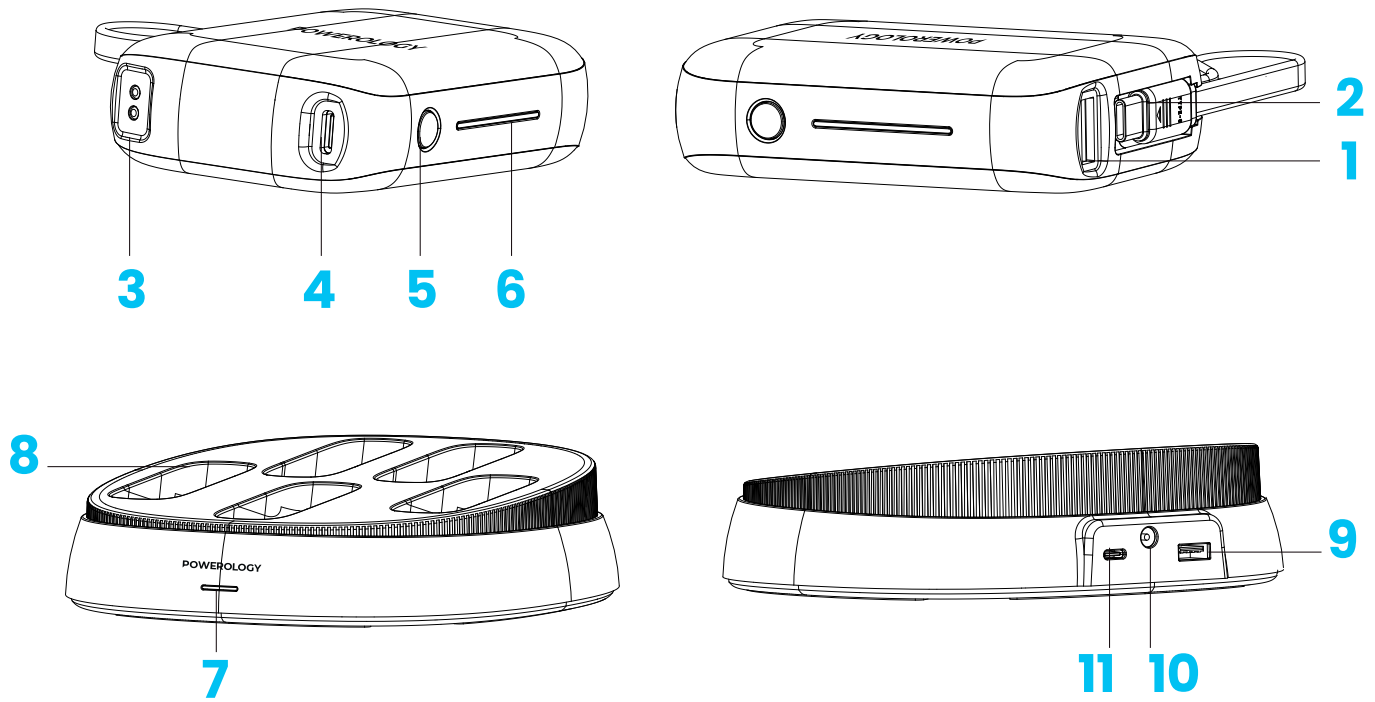

1. USB-A output
2. Built-in type-C cable
3. Contact pin input
4. USB-C input and output
5. On/off button
6. LED indicator on power bank

7. LED indicator on charging base
8. Contact pin output
9. USB-A output on charging base
10. Adapter input
11. USB-C output on charging base

Specifications

Power Bank Capacity	5× 10000mAh
Built-in Cable	Type-C
USB-C Input	5V/3A, 9V/2A (PD18W Max.)
USB-C Output	5V/3A, 9V/2.22A, 12V/1.5A (PD20W Max.)
USB-C Cable Output	5V/3A, 9V/2.22A, 12V/1.5A (PD20W Max.)
USB-A Output	5V/3A, 9V/2A, 12V/1.5A 18W
SCP	10V/2.25A (22.5W Max.)
Contact Input	12V/1A Max.

Total Output	5V/3A
Power Bank Dimensions	25.6×61.8×91mm
Power Bank Weight	5 ×191g
Charging Base DC Input	DC 12V/6A 72W
Charging Base Contact Output	5 ×12W, 60W Total
Charging Base USB-C Output	5V/3A, 9V/2.22A (PD20W)
Charging Base USB-A Output	5V/3A, 9V/2A 18W
Charging Base USB-A1 + USB-C1 Output	5V/3A 15W
Charging Base Dimensions	47.1×168.8×168.9mm
Charging Base Weight	278g

Charging the Power Bank

1. Recharge the power bank by connecting an AC charging adapter to a power source. Place the power bank on the charging base, and the LED indicator will display the current power level.
2. Use a Type-C to Type-C cable or a Type-C to USB-A cable to connect the power bank to a computer, car charger, or wall charger. The power bank will charge automatically, and the LED indicator will show the current power level.

Charging Devices

1. Using the power bank's built-in Type-C to Type-C cable, connect your device to the cable to begin charging. Press the power button once, and the LED indicator will display the current power level. The power bank will then start charging your device.
2. Using your device's cable (not included), connect the cable to the power bank and your device. Press the power button once, and the LED indicator will display the current power level. The power bank will then start charging your device.

3. After charging is complete, you can press the button twice to turn off the power bank manually. Alternatively, it will automatically turn off after approximately 35 seconds of inactivity.

Features

- 1.** Includes 5 power banks within one power station, offering easy usability.
- 2.** Equipped with a 72W fast-charging AC adapter.
- 3.** Features fast charging via USB-A and USB-C outputs.
- 4.** 10000mAh capacity for each individual power bank.
- 5.** Integrated LED indicator for power status.
- 6.** USB-A output delivers up to 22.5W of high power.
- 7.** USB-C port supports PD20W fast charging for both input and output.
- 8.** Built-in Type-C cable enables PD20W fast charging output.
- 9.** Includes 12W contact pin input for added compatibility.
- 10.** Supports charging protocols for a variety of fast-charging products on the market.
- 11.** Provides high transfer efficiency for optimal performance.
- 12.** Features a Li-ion battery cell with high safety and stability.
- 13.** Low self-discharge ensures long standby times.
- 14.** High compatibility with various mobile phones.
- 15.** Intelligent protection system prevents overcharging, discharging, overheating, and short circuits.
- 16.** Compact and portable design makes it easy to carry.

Warnings

- 1.** Carefully read all instructions before using the product.
- 2.** When using this product for the first time, perform a full charge and discharge cycle to extend its service life.

- 3.** Ensure the device you want to charge is compatible with the power bank's specifications.
- 4.** Keep the power bank out of reach of children, infants, and pets.
- 5.** Avoid dropping or subjecting the power bank to impacts.
- 6.** Do not expose the power bank to water or immerse it in water.
- 7. Warning:** If the power bank comes into contact with water, do not use it.
- 8.** Do not puncture or disassemble the power bank. Do not disassemble the product under any circumstances. This may cause overheating, fire, or an explosion.
- 9.** Never throw the power bank into a fire, as it may cause an explosion.
- 10.** If the power bank malfunctions or is swallowed, stop using it and contact a service center immediately.
- 11.** Do not dispose of the power bank as household waste.
- 12.** Avoid leaving the power bank in a car on hot days. Do not expose the battery to direct sunlight, fire, or extreme heat. Avoid ambient temperatures above 40°C.
- 13.** Do not use the power bank in environments with high temperatures or humidity. Store it in a cool, dry place when not in use.
- 14.** Always monitor the power bank when it is charging other devices or being charged. Never leave it unattended.
- 15.** Disconnect the charger once the battery is fully charged; do not leave it charging for an extended period.
- 16.** Improper battery replacement may result in an explosion. Use only the same or equivalent battery type, and ensure replacement is performed by maintenance personnel, not by unqualified individuals.
- 17.** Improper battery replacement may result in an explosion. Use only the same or equivalent battery type, and ensure replacement

is performed by maintenance personnel, not by unqualified individuals.

18. When using a power adapter for charging, only use a branded certified adapter that complies with standard requirements.

19. Avoid using the power bank in strong electrostatic or electromagnetic environments, including near microwaves, as this may reduce the device's lifespan.

20. If the power bank emits an odor, excessive heat, discoloration, or becomes distorted, discontinue use immediately.

21. If the power bank is unused for three months or more, its battery capacity may decrease. However, normal capacity can be restored after 3 to 4 charge and discharge cycles.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website **powerology.me/warranty** and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:
powerology.me/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at: **hey@powerology.me**

Website: **powerology.me**

Instagram: **[powerology_official](https://www.instagram.com/powerology_official)**

Facebook: **[powerology.ME](https://www.facebook.com/powerology.ME)**