



Powerology

**Charging Power Bank
27000mAh Solar Wireless**

SKU: PPBCHA77

Table of Contents

Preface	2
Specifications	2
Schematic View	3
Features	4
Instructions for Use	5
Indicator Light Guide	7
Note	8
Warning	9
Disposal	9
Warranty	10
Contact Us	10

Preface


Thank you for purchasing this power bank. This product allows you to charge tablets, phones, pods, and various types of smartphones, enabling you to stay connected and enjoy the outdoors. For optimal performance, please ensure to read this manual thoroughly before using the device.

Specifications

Battery Type	Li-Polymer
Battery Capacity	27000mAh/99.9Wh
Type-C Input	5V/3A, 9V/2A, 12V/1.5A, PD 18W Max
Type-C Output	5V/3A, 9V/2.2A, 12V/1.67A, PD 20W Max
Type-C Cable Output	5V/3A, 9V/2.2A, 12V/1.67A, 20W Max
USB-A Output	4.5V/4A, 5V/4.5A, 9V/2A, 12V/1.67A, 22.5W Max
Wireless Output	15W Max
Full-Charge Time	7H
Solar Panels	5V/300mA, 1.5W Max
Cable Length	70mm
Operating Temperature	0°C to 45°C
Product Size	164 x 85 x 44mm
Weight	624g

Schematic View


- 1. Power Button
- 2. LED Indicator Lights
- 3. Magnetic Wireless Charging
- 4. Silicone Waterproof Cover
- 5. Built-in Retractable Charging Cable
- 6. Solar Panel
- 7. LED Lighting
- 8. Type-C Port
- 9. USB Port
- 10. Hooks

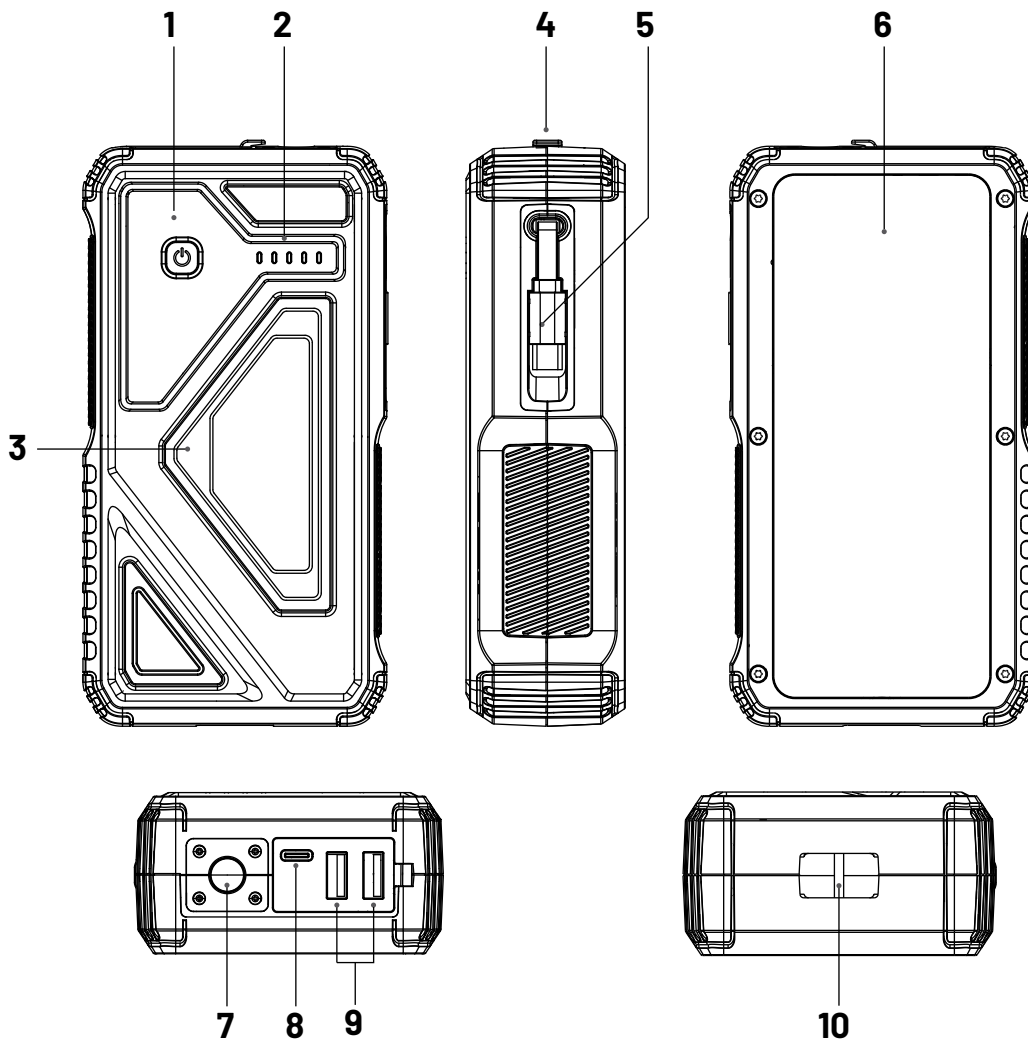



Features


- 1.** The power bank's 27000mAh large capacity ensures you can charge your devices multiple times.
- 2.** With an IP54 rating, the power bank is resistant to water splashes, ensuring reliability in wet conditions.
- 3.** An LED display shows the remaining battery level and charging status clearly and conveniently.
- 4.** The 22.5W fast charging capability enables rapid recharging of devices, significantly reducing downtime.
- 5.** The solar panel, with a power output of 300mA, offers an eco-friendly charging option using solar energy.
- 6.** Equipped with sport portable hooks, the power bank can be easily attached to bags and gear for on-the-go use.
- 7.** This power bank supports 15W magnetic wireless charging, providing a convenient charging solution for compatible smartphones.
- 8.** Features an emergency flashlight with three LED modes, including a flashing SOS for urgent situations.
- 9.** Includes a built-in retractable cable for easy and compact cable management.

Instructions for Use

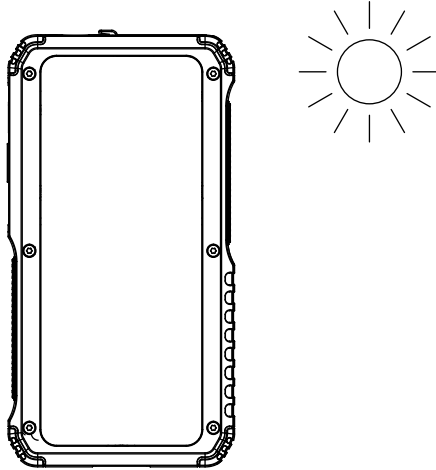


The solar panel has a power output of 300 mA. The LED display will blink when charging with solar energy.

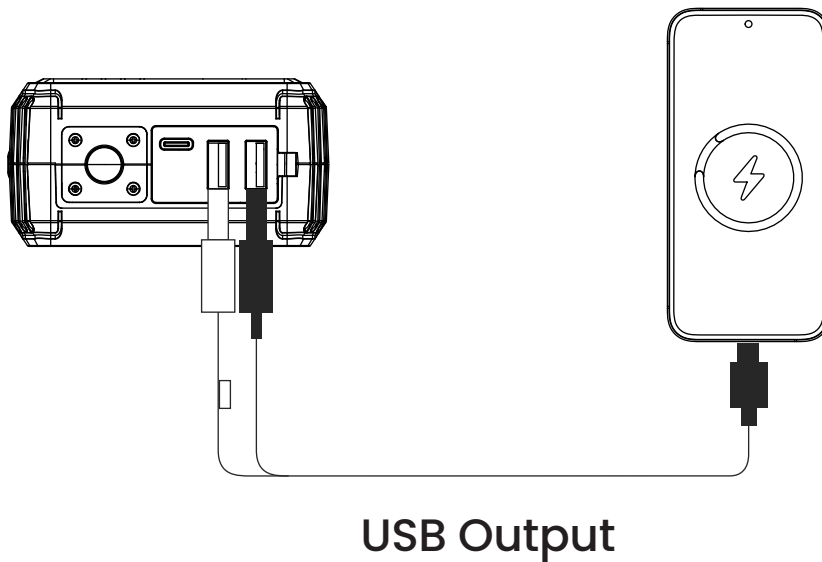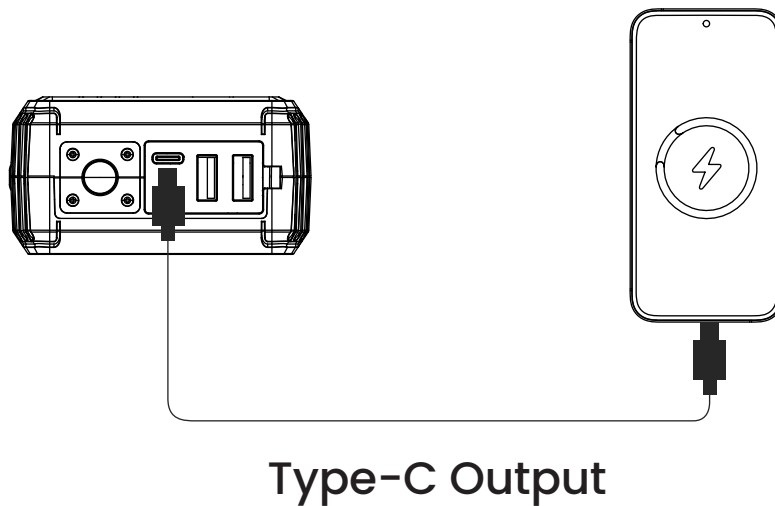


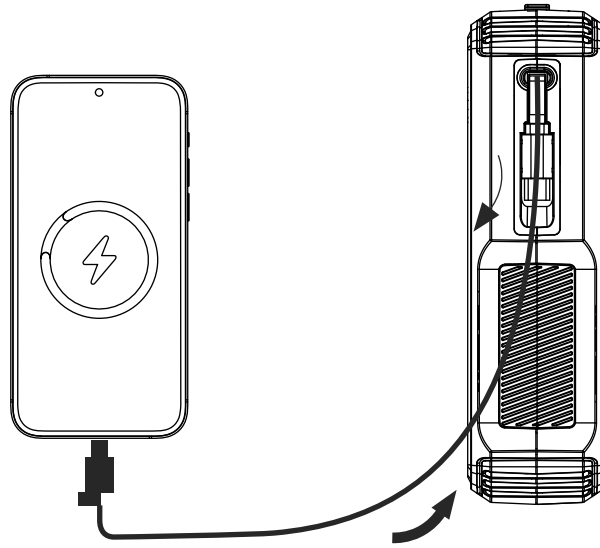


Built-in Retractable Type-C Output

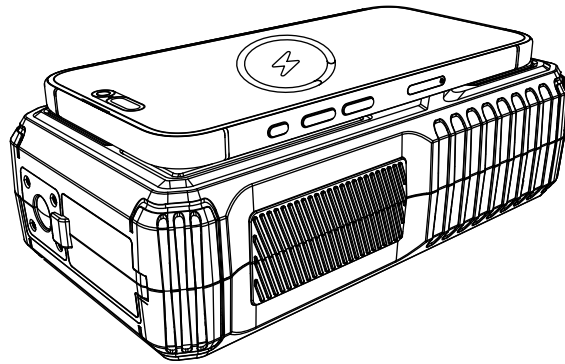

Magnetic Wireless Charging

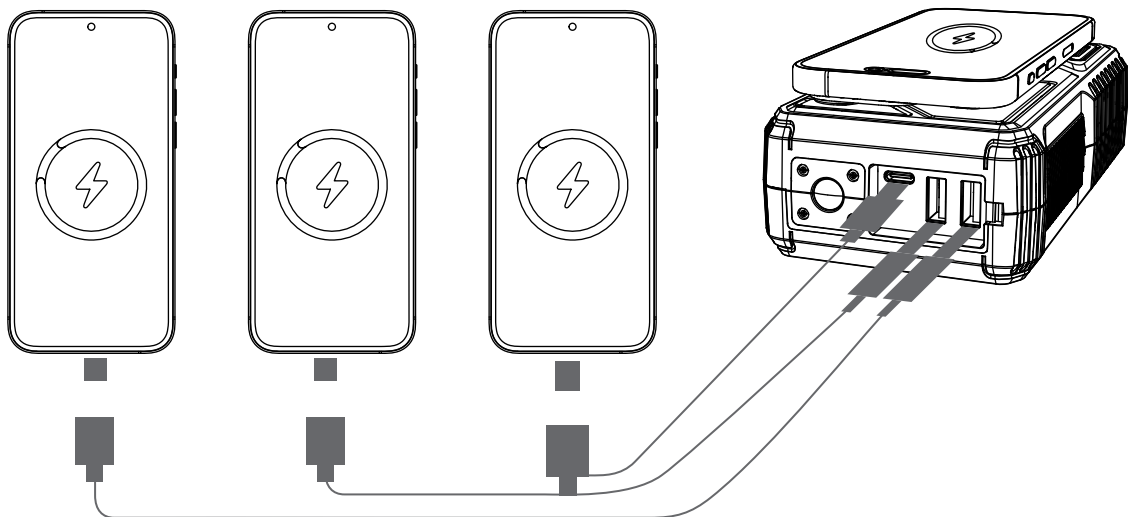

This power bank can simultaneously charge up to three devices.
Note: When charging multiple devices at the same time, the output power will be regulated to 5V/3A.

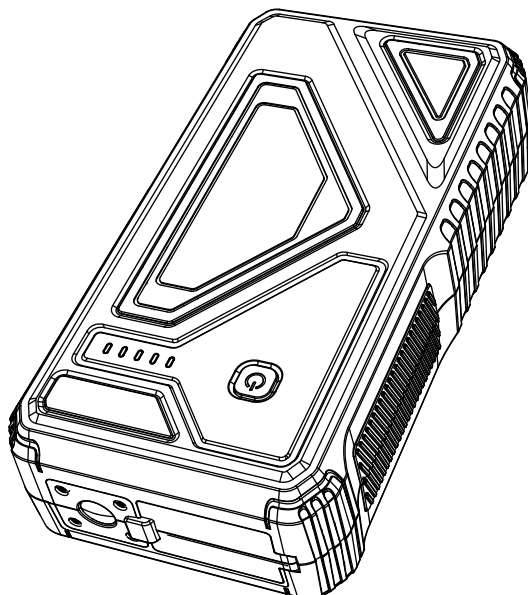

1. Press the button to activate the power bank and display the remaining power.
2. Press the button again to initiate wireless charging.
3. Hold the button down to turn on the LED light.
4. Press the button again to switch to the caution light.
5. Press the button once more to change to the SOS flashlight mode.
6. Press the button again to turn off the flashlight.

Indicator Light Guide

LED Indicator Light	Charge Level
	100%
	99-81%
	80-61%
	60-41%
	40-21%
	20-0%

Note

1. Use a cable that is compatible with your mobile phone and other digital devices.
2. Slight heating may occur during the charging and discharging processes.
3. Store the Power Bank in a dry and cool place when not in use. If not used for an extended period, please ensure it is fully charged at least every three months.
4. Please use the cable that was included with your Power Bank for charging.
5. Avoid placing metal or sharp objects near the Power Bank to prevent scratches or damage.
6. Solar charging is intended for emergency use only.
7. Never attempt to open or disassemble the solar charger. Avoid exposing the solar charger to external pressure or severe impacts.
8. The solar charger is waterproof but should not be submerged in liquid for any period of time. While this device can charge in high temperatures, it should not be left in direct sunlight for extended periods as it can withstand a maximum temperature of 45 degrees Celsius (113 degrees Fahrenheit).
9. Please stop using this device if it begins to swell or expand and contact the local distributor immediately.

Warning

1. Do not attempt to open or dismantle the product.
2. Do not expose the power bank to naked flames or extreme heat.
3. Do not stand on or apply pressure to the power bank.
4. Do not allow children to play with the power bank.
5. Do not leave the product in a closed car for an extended period.
6. Please ensure the device is not charging for prolonged periods in high temperatures, as it has a maximum temperature tolerance of 45°C (113°F).
7. Stop using this power bank if it expands or breaks down, and contact the local distributor immediately.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website **powerology.me/warranty** and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:
powerology.me/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at: **hey@powerology.me**

Website: **powerology.me**

Instagram: **powerology_official**

Facebook: **powerology.ME**