



Powerology


**2500W 4 AC Power Strip
with Built-In Retractable Cables**

SKU: PWCUQC029

Table of Contents

Schematic View	2
Specifications	2
Instructions for Use	3
Using the Timer Function	4
Using the Built-In Cable	5
Safety Precautions	5
Warranty	7
Contact Us	7

Schematic View

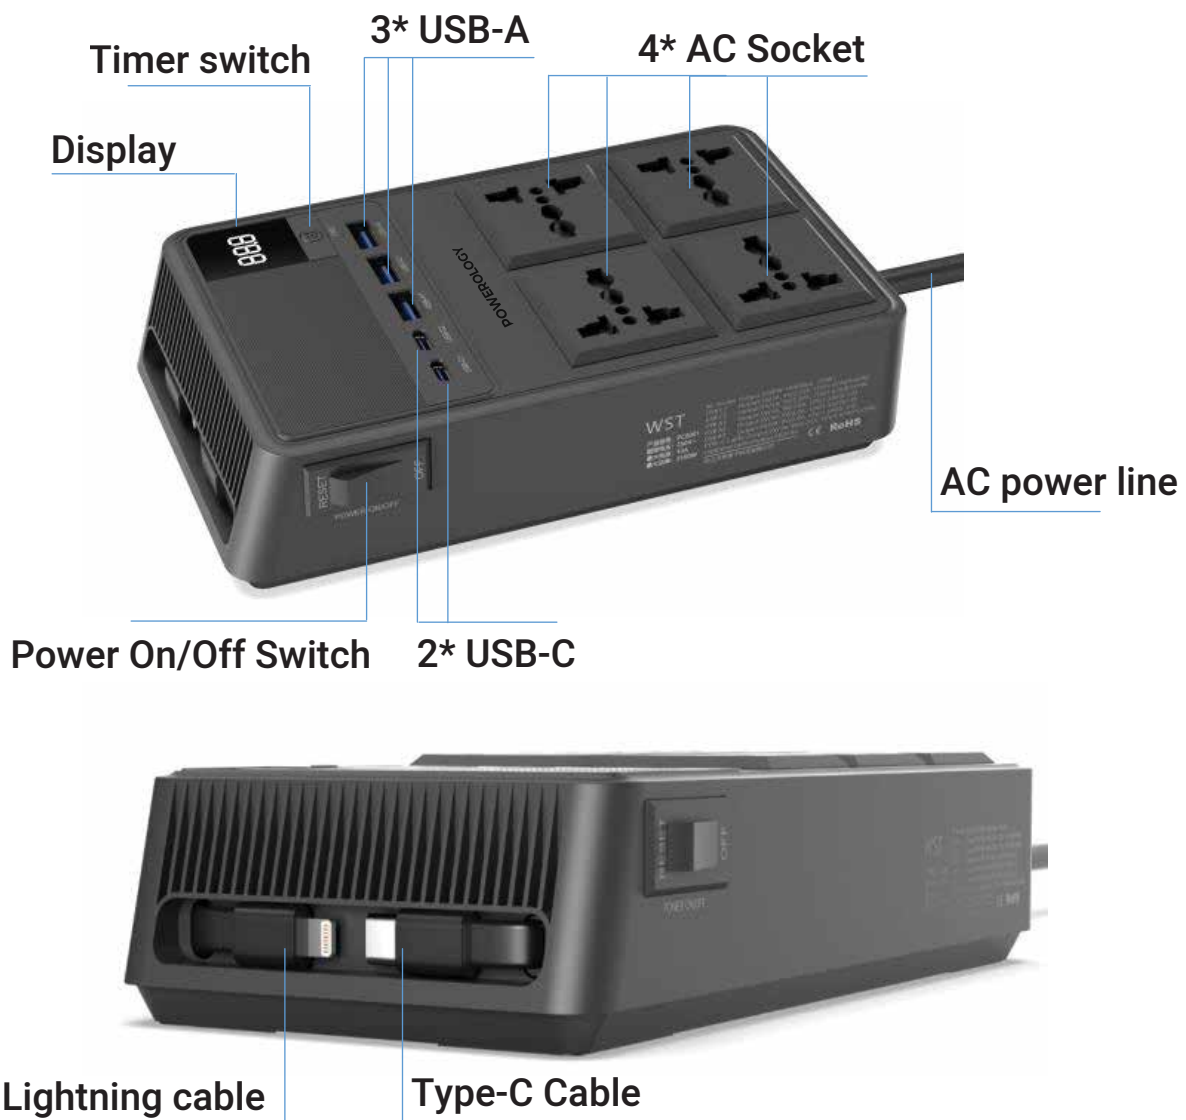

Specifications

Input	100-240V, 50-60Hz, 10A
USB-C	5V/3A, 9V/2.22A, 12V/1.67A, PD20W
USB-A	5V/3A, 9V/2A, 12V/1.5A, QC3.0 18W
USB-C Cable	5V/2.4A, 12W, 9V/2.22A, 12V/1.67A, PD20W
Lightning Cable	5V/2.4A
All Ports/Wired Simultaneous Use	5V/3A, 15W
DC Total Power	58W Max
AC Total Power	2500W Max
Cables Length	70cm
Power Cord	3M UK Plug
Standard	CE, RoHS

Instructions for Use

Step 1: Plug the AC power cord of this product into the AC socket.



Step 2: Press the power switch (Power On / Off) to the On position. The display screen will light up and show "OFF." All DC and AC ports will be activated and ready for normal use.



Press the left side

Warning: When connecting or disconnecting the AC port, please ensure the total output is turned off. Avoid touching high-voltage areas to prevent accidental contact with electrical components.

Using the Timer Function

Step 1: Connect the product to an AC power supply.

Step 2: Press and hold the Timer switch for 5–3 seconds. The display screen will show "0.5 (H)" to indicate that the timer function is activated.



Step 3: To set the timer, press the TIME switch. Each press increases the timer by 0.5 (H). When the timer reaches 24 (H), it will automatically reset to 0.5 (H), and the cycle will repeat. Set the desired time for the product.

Step 4: Once the timer is set, the countdown will begin, and the display will update every 0.5 (H). When the timer reaches 0.0, the DC port will automatically stop outputting power.

Step 5: To restart the timer, press the timer button.

Step 6: If the timer function is no longer needed, press and hold the TIME switch for 5–3 seconds to turn off the timer function. The display will show "OFF," and the DC port will continue to function.

Note: When setting the timer function, please carefully assess the timing to prevent any impact on the power equipment when the DC port is not in use.

Using the Built-In Cable

Step 1: Remove the required cable by following the arrow position below.



Step 2: After removing the cable joint, gently pull the wire in the vertical direction. When a "click" sound is heard, the cable is fully extended.



Step 3: To retract the cable, gently pull the wire in the vertical direction. When a "click" sound is heard, slowly release the cable, and it will automatically retract.

Warning: When using the cable, please pull it gently to prevent damage to the wire.

Safety Precautions

1. Before using the product, please carefully read the User Manual to guarantee correct usage and keep it secure for future reference.

- 2.** Keep the product away from children, infants, and pets to prevent accidental contact and accidents.
- 3.** The recommended ambient temperature for this product is between -20°C and 45°C .
- 4.** Handle the product with care when moving it. If it needs to be relocated, please disconnect the AC socket cable before moving.
- 5.** Ensure the plug is securely inserted into the jack when in use. The product may generate slight heat, which is normal.
- 6.** This product is not waterproof and should only be used in a dry indoor environment. Keep it away from wet, dusty, fire, water, and other liquid sources.
- 7.** Do not expose the product to heat or place it in a fire.
- 8.** Do not create a short circuit with the product, and avoid storing it with coins, jewelry, keys, or other metal objects.
- 9.** This product contains high voltage. Non-professionals should not attempt to disassemble it to avoid accidents.
- 10.** The product contains high voltage power. Only the plug should be inserted into the jack.
- 11.** If you do not intend to use the product for an extended period, please disconnect the socket cable.
- 12.** The total power resistance load of the electrical appliances connected to the product should not exceed the maximum power rating of 2500W. Exceeding this limit may damage the product and, in severe cases, cause a fire.

Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website **powerology.me/warranty** and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:
powerology.me/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at: **hey@powerology.me**

Website: **powerology.me**

Instagram: **powerology_official**

Facebook: **powerology.ME**