



Powerology

**32" Google 4K Screen
with 4K Camera**

SKU: P32UHDTGD

Table of Contents

Features	2
Safety Precautions	2
Package Contents	3
Screen Installation	4
Camera Installation	6
Adjustment	7
Instructions for Use	7
Cable Connection	8
Specifications	9
Warranty	10
Contact us	10

Before installing and using the product, please carefully read this User Manual to guarantee correct usage and keep it secure for future reference.

Features

- 1.** Offers up to 4 hours of continuous operation, ideal for extended use without needing a recharge.
- 2.** Features an 8MP camera that can be detached for flexible use and enhanced portability.
- 3.** Runs on the latest Android 13 operating system, ensuring up-to-date features and optimal performance.
- 4.** Equipped with a 120W power supply for fast and efficient power delivery, supporting even the most demanding tasks.


Safety Precautions

- 1.** Before installing and using the product, please carefully read this User Manual to ensure correct usage, and keep it for future reference.
- 2.** Keep the display away from water sources or damp places such as bathrooms, kitchens, basements, and swimming pools.
- 3.** Ensure the display is placed on a flat surface. Incorrect placement may lead to device damage or human injury.
- 4.** Store and use the display in a cool, dry, and well-ventilated area. Avoid exposure to heat and emission sources.
- 5.** Do not cover or block the vent hole in the rear casing. Avoid using the product on soft surfaces like beds or sofas, where ventilation might be obstructed.
- 6.** The supplied input voltage should comply with the instructions on the product package and the specifications table in the user manual.


7. If the display will not be used for an extended period, disconnect the power supply to prevent risks of electric shock or damage from power surges.
8. Always use a reliable grounded socket. Do not overload the socket to prevent fire or electric shock.
9. Do not insert any foreign objects into the display, as this can cause short circuits, leading to fires or electric shocks.
10. Do not attempt to disassemble or repair the product yourself. Please contact authorized service professionals.
11. Avoid pulling or twisting the power cable forcefully.
12. Maintain a distance from places with strong electromagnetic fields to avoid interference with the display's operation.

Package Contents


Please ensure that the package contains all the parts listed. If any of the items are missing, avoid using the product and contact the supplier for further instructions.

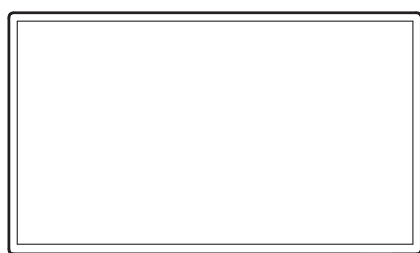


Powerology Screen

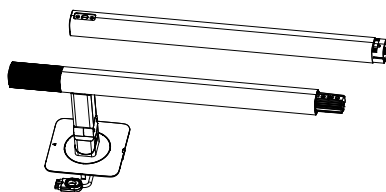


Screen Stands



Base



Camera




Base Screw ×5




Stand Screw ×2




Stand Cover ×2




Screwdriver

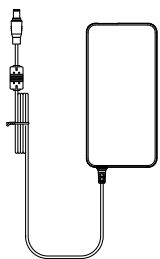


Power Adapter



Power Cable

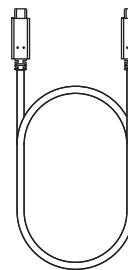



Type-C Cable

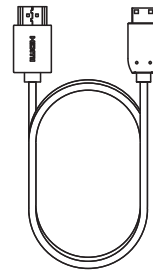



HDMI Cable

Screen Installation

1. To assemble the Stand, open the package and remove the stand stem. Connect the two parts of the stand stem following the specified order. Secure them together with two stand screws. Align the stand cover with the card slot and fasten it securely.

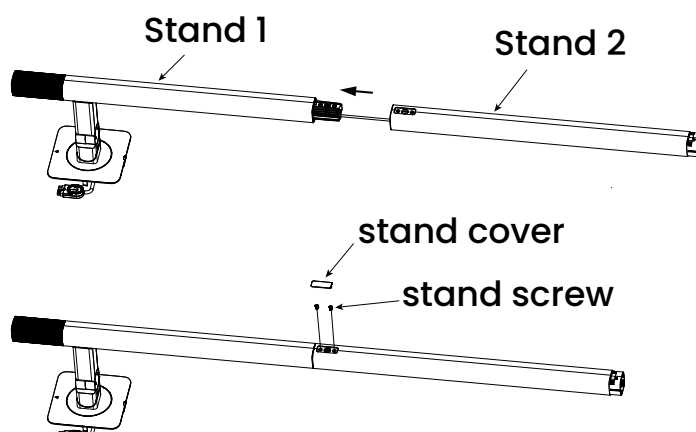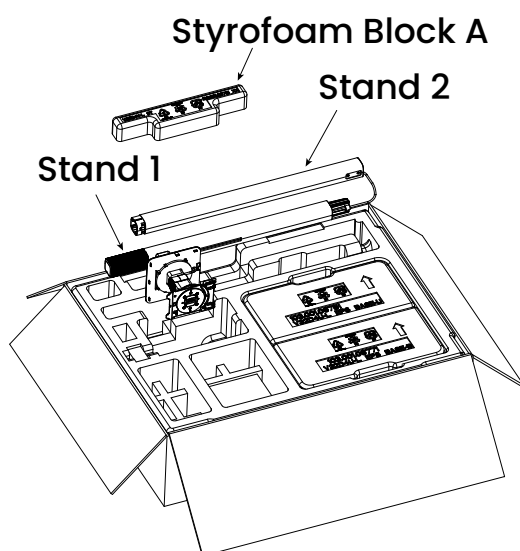


2. Carefully remove the Styrofoam blocks B and C in that specified order. Properly position the base as illustrated in the diagram.

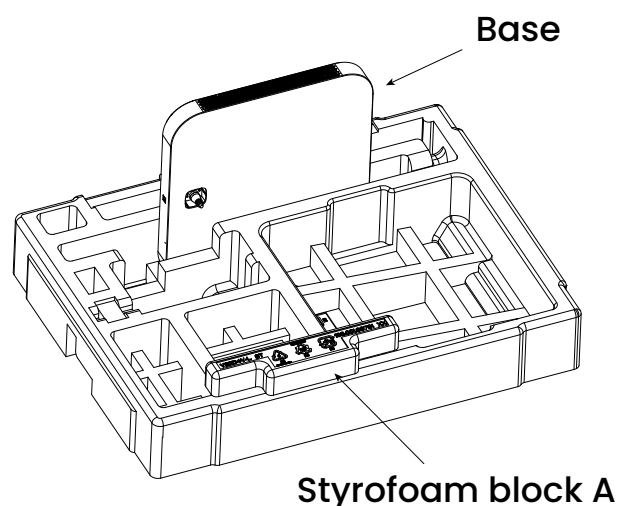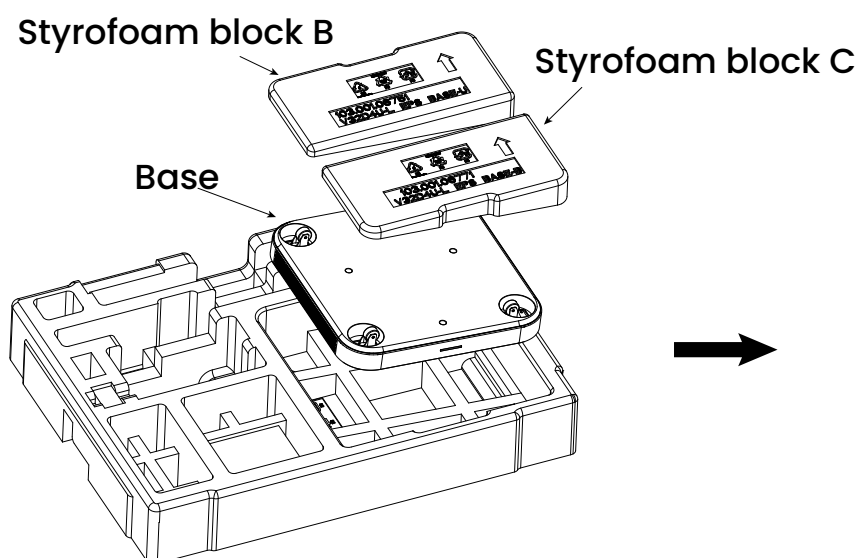


Note: The weight of the chassis exceeds 10KG. Exercise caution during handling.

3. Fasten the stand stem and base together using 4 screws.

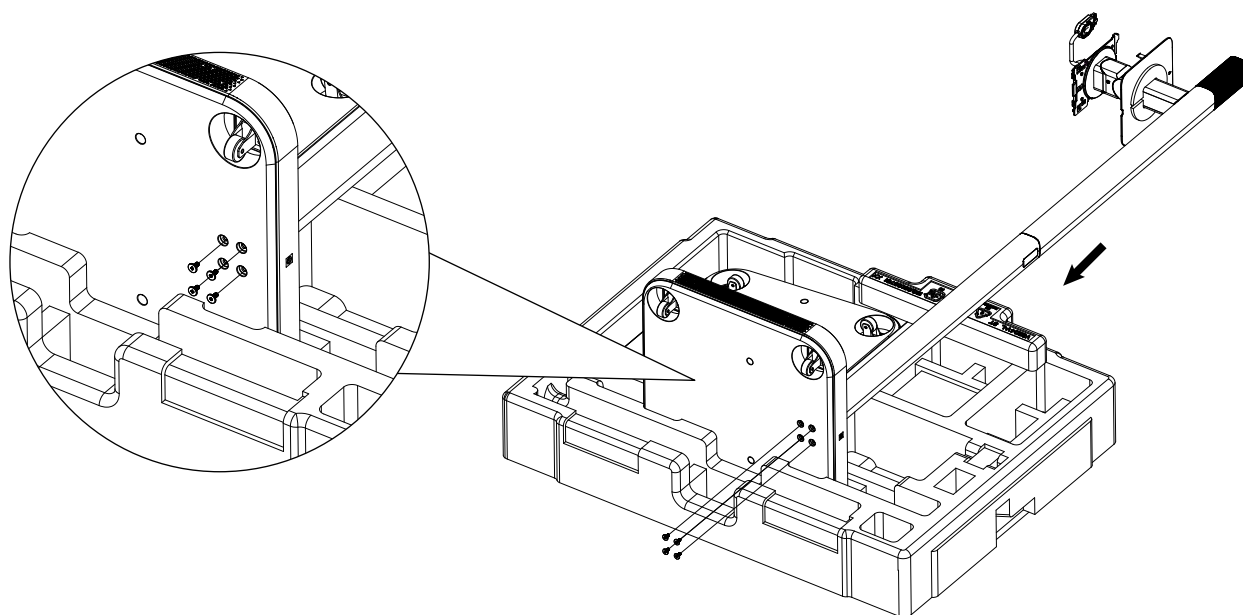


4. Place the stand in upright position. Attach the display. Utilize the "bracket hook" and "Bracket Slot" for easier handling. Position the power socket on the "left side", then slide the display close to the stand bracket until you hear a "click" sound indicating secure attachment.

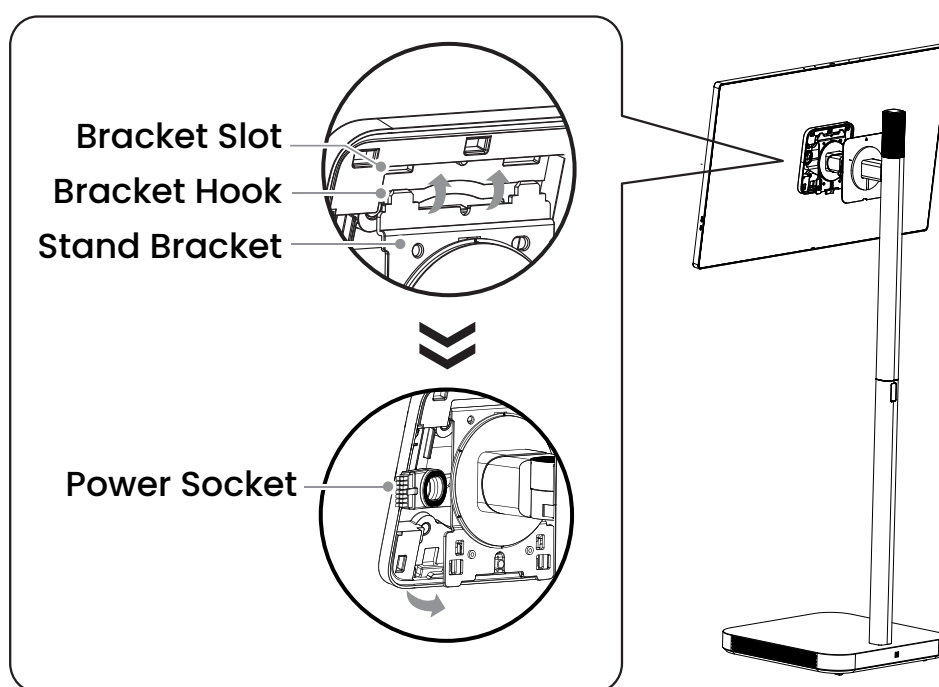


Note: Ensure the power socket is positioned on the "left side" before connecting the display and bracket.

5. Insert the power socket into the designated slot. Remove the pearl cotton from the VESA cover, and attach the VESA cover to the display, ensuring the "arrow" on the VESA cover faces "upwards" when the display is horizontal.

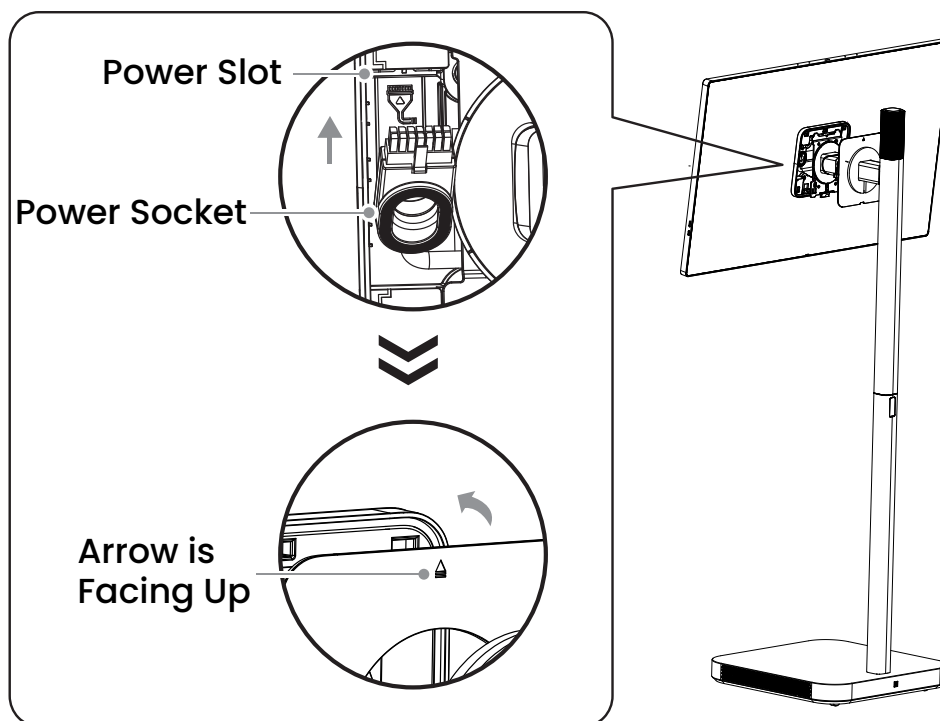


Camera Installation

The camera can be magnetically attached to either the top or the left side of the display.

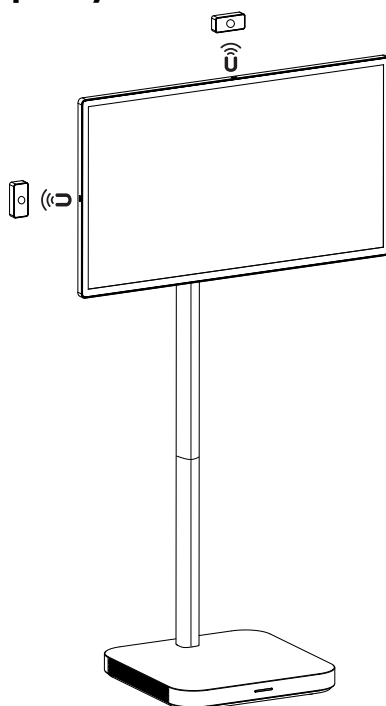

Adjustment

Users are permitted to adjust the angle of the screen, the height of the stand, as well as the horizontal or vertical orientation of the screen, and can also rotate the screen left and right.

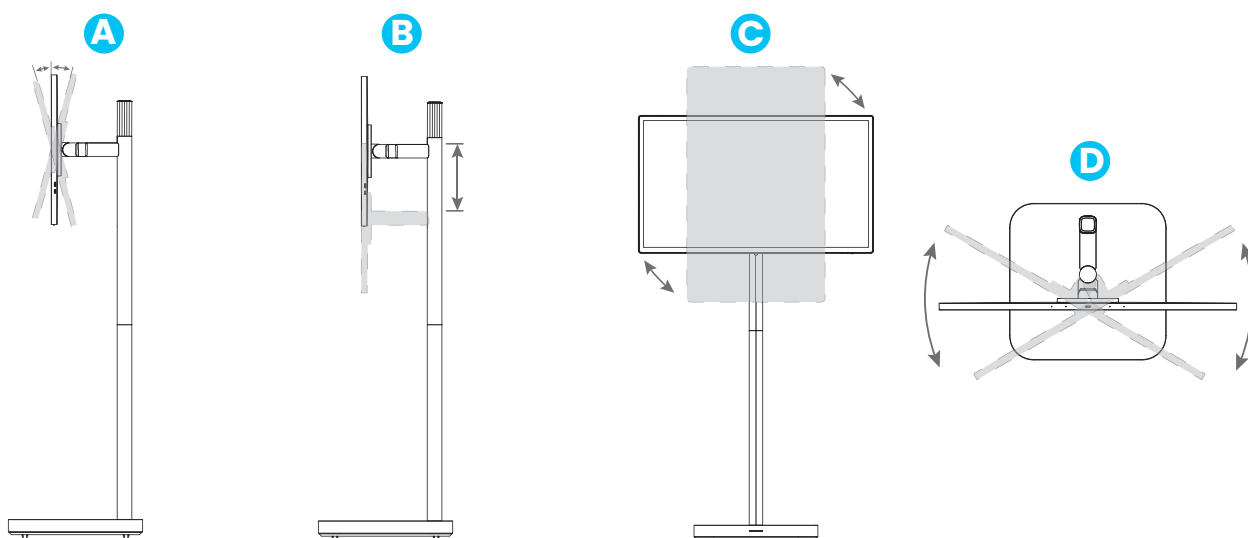


A. Tilting Angle: $\pm 18.0^\circ$ ($\pm 2.0^\circ$)

B. Height Adjustment: 200mm (± 8.0 mm)

C. Vertical Angle: $\pm 90.0^\circ$

D. Rotation Angle: $\pm 30^\circ$ ($\pm 2.0^\circ$)

Instructions for Use

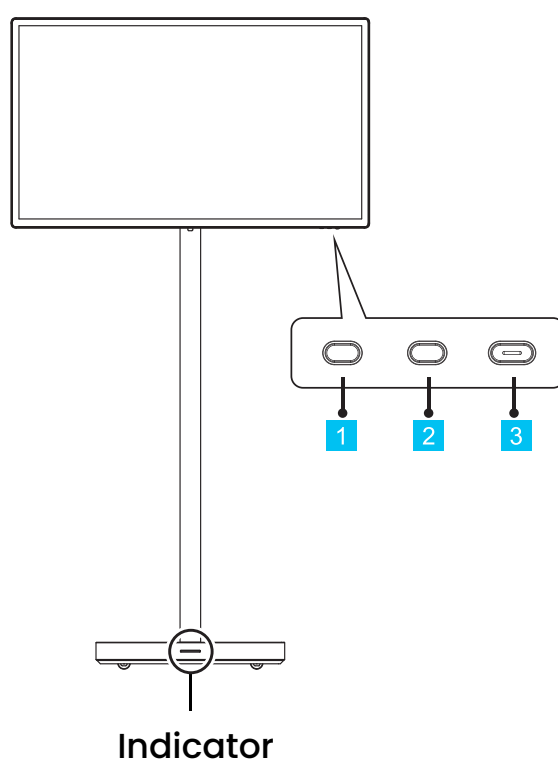


Button Guide	
1	Volume Down
2	Volume Up
3	Power On/Off

Indicator Light	
Blue	Device is On and functions normally.
Green	Device is fully charged. (The power level is >98 %)
Red	Device's power is low. (The power level is <10 %)
No Light	Device is Off.

Note: While charging, when power level is from 10 % to less than 98 %, no indicator light is on.

Cable Connection

1. Use an adapter to connect the screen to an electrical power outlet, and attach the other end of the power cable to the DC input port on the device's base.
2. Utilize the Type-C and HDMI input ports on the screen to connect it to other devices. The Type-C port allows you to connect the screen to phones, tablets, and notebooks, while the HDMI port can be used to link the screen to personal computers or notebooks.

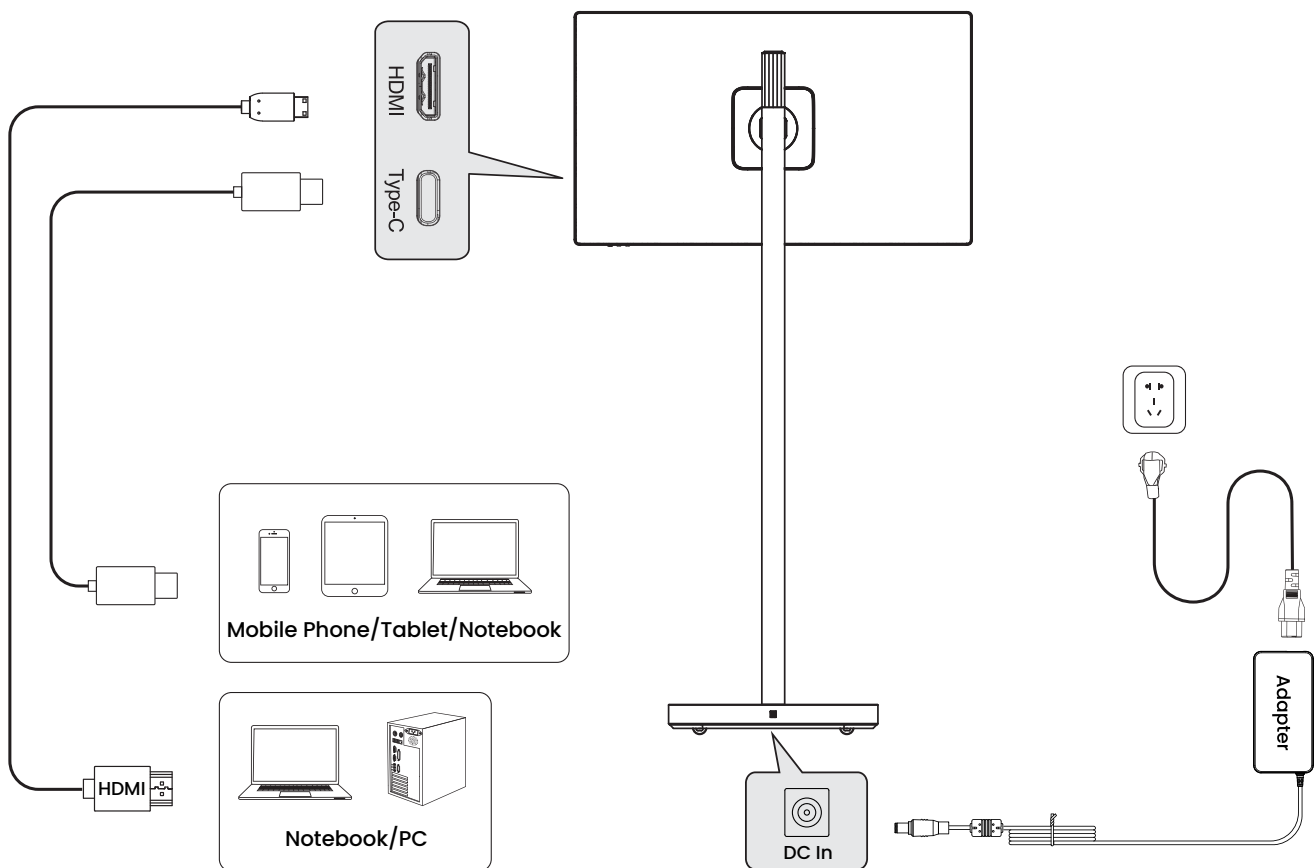

Specifications

Product Name	Powerology 32" Google 4K Screen with 4K Camera
SKU	P32UHDTGD
Operating System	Android 13
RAM and Memory	8+128GB
Screen Size	31.5"
Aspect Ratio	16:9
Viewing Angle	178°(H)/178°(V)
Tilting Angle	±18.0° (±2.0°)
Height Adjustment	200mm (±8.0mm)
Vertical Angle	±90.0°

Rotation Angle	±30° (±2.0°)
Camera	8MP
Battery Capacity	9800mAh 19.8V
Input Voltage	19V/6.32A
Working Time	4h
Recharge Time	2.5h
Speaker	4 *2Ω 10W
Wi-Fi	2.4GHz, 5GHz, Wi-Fi6
Bluetooth Version	V5.2
Display Resolution	3840×3460 4K UHD
Interface	HDMI 2.0 Type-C 3.1
Power Plug	UK 3-Pin Plug
Net Weight	17Kg
Gross Weight	20.3Kg
Working Temperature	0°C to 40°C (32°F to 104°F)
Working Humidity	10 % to 90 % RH (Non-condensing)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Humidity	5 % to 95 % RH (Non-condensing)
Dimensions with Stand	731.5×1329×385mm
Dimensions without Stand	731.5×429×28.3mm

Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website **powerology.me/warranty** and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:
powerology.me/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at: **hey@powerology.me**

Website: **powerology.me**

Instagram: **powerology_official**

Facebook: **powerology.ME**