



Powerology

Qi2 Speaker Charge Station

SKU: PWCUQC039



Table of Contents


Overview	2
Schematic View	2
Button Guide	3
Specification	4
FAQ and Solution	5
Compatibility	5
Cautions	6
Disposal	7
Warranty	8
Contact Us	8


Overview

This product is a multifunctional wireless charger equipped with a smart chip that supports simultaneous charging for three devices: mobile phones, smartwatches, and earphones. It features a unique hidden design specifically for charging watches and earphones, a Bluetooth surround sound speaker, and magnetic suction that automatically rotates the phone to the optimal charging position, also serving as a phone holder.

With its high efficiency, stable performance, and rapid charging capabilities, this device provides the convenience of wireless charging technology. Furthermore, it supports wireless charging for other electronic devices that are compatible with the Qi standard.

Schematic View

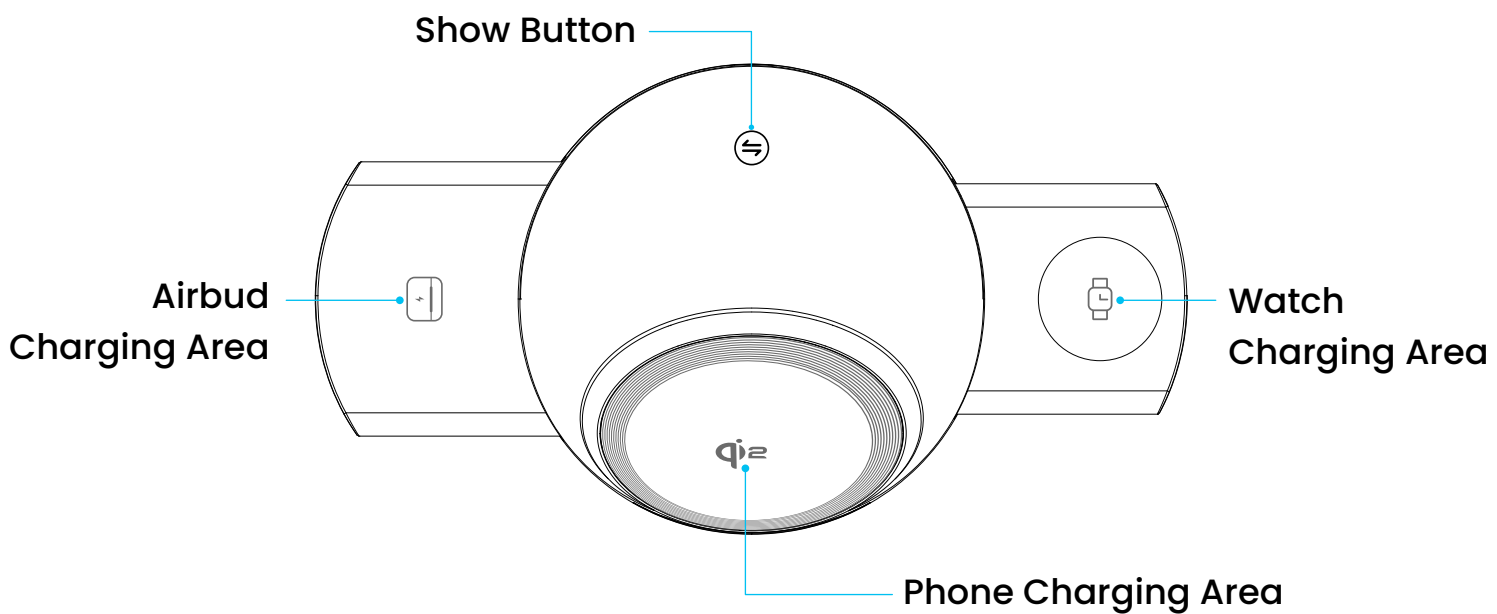

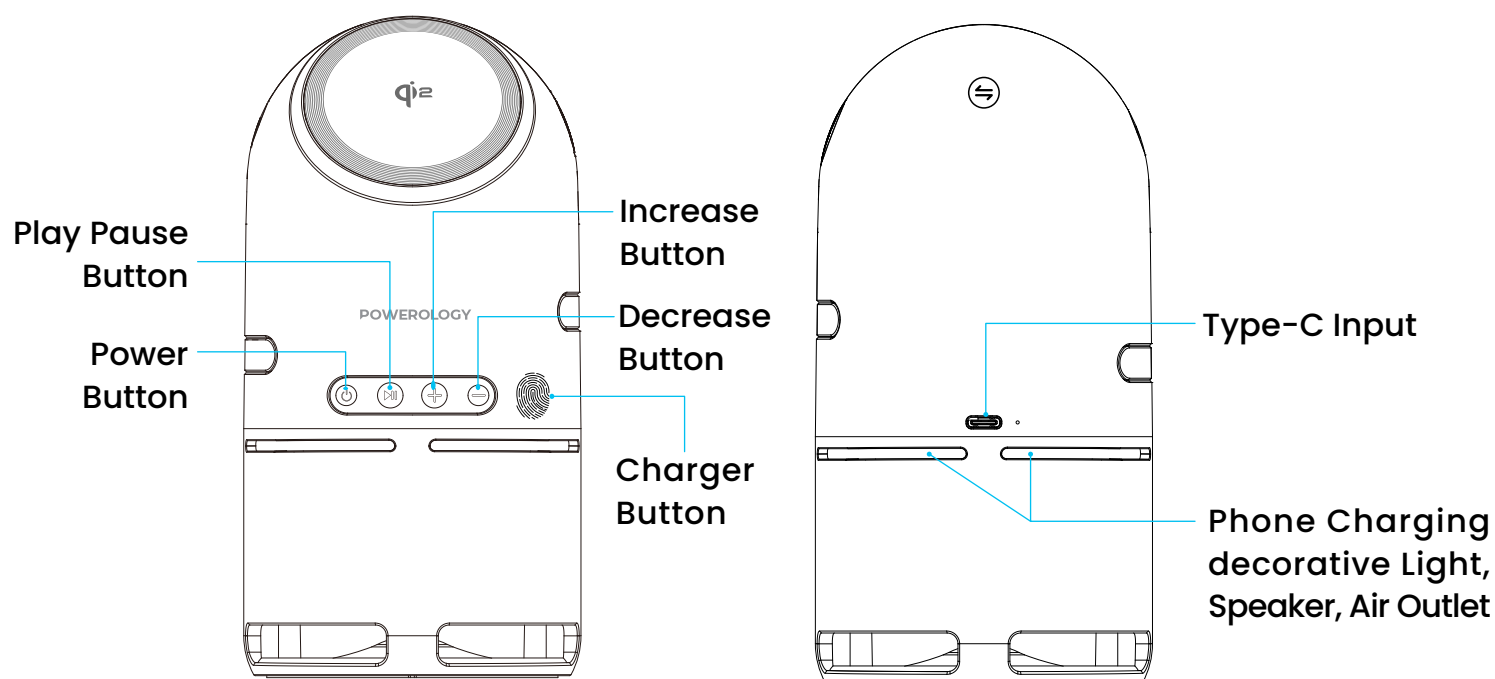



Button Guide

1. Four physical buttons: () Power ON/OFF button, () Play/ Pause button, () Plus button, () Minus button

	Short Press	Press and Hold	Double Press
	No action	On, off	Disconnect
	Play Pause	No action	Disconnect
	Play Next Song	Decrease the volume	No action
	Play Previous Song	Increase the volume	No action

2. Two Mechanical Buttons:

() **Charger Rotary Button:** Touch this button to rotate the phone charging area counterclockwise by 90 degrees. Touch this button again to rotate it clockwise by 90 degrees and return to the original position.

() **Show Button:** Touch this button to slowly extend the watch and earphone charger. Touch this button again, and the charger will slowly retract to hide.

3. Charging Indicator Light / Phone Charging Decorative Light: When the power is plugged in, the light will turn on for 2 seconds and then turn off. When charging the phone, the light will stay on for 30 seconds and then turn off.

4. Bluetooth Device Name: Qi2_PWC039

Specification

Model Number	PWC039
Battery Capacity	1000mAh
Input	9V/3A
Phone Output	5W, 7.5W, 10W, 15W
Earbuds Output	5W
Smartwatch Output	5W
Speaker Output	5W
Product Weight	592g
Product Dimension	86 x 168×86mm
Bluetooth Name	Qi2_PWC039
Bluetooth Version	V5.3

FAQ and Solution

1. Is the phone not charging?

A. The phone is not aligned with the sensing area, or the receiving coil is not installed correctly.

B. Battery mode is only available for Bluetooth devices. If you need to charge a device such as a cell phone, you need to turn on the power first.

2. Is charging hot?

It is normal for the receiving coil or transmitter board to become warm during wireless charging.

3. Is cell phone charging intermittent?

A. The charging current of the adapter is insufficient, or the voltage is unstable. Please use a QC3.0 fast charging head.

B. The charging position is too partial, and electromagnetic induction is weak. Adjust the charging position.

4. Is charging slow?

The phone itself or the external receiving coil may allow different sizes of wireless charging currents. If the standby power consumption is high while the phone is charging, it is recommended to reduce the standby program of the phone.

Compatibility

1. Smart Phone

For Apple:

iPhone 16, iPhone 16 Pro, iPhone 16 Pro Max, 16 Plus
iPhone 15, iPhone 15 Pro, iPhone 15 Pro Max, 15 Plus
iPhone 14, iPhone 14 Pro, iPhone 14 Pro Max, iPhone 14 Plus
iPhone 13, iPhone 13 Pro, iPhone 13 Pro Max, iPhone 13 mini
iPhone 12, iPhone 12 Pro, iPhone 12 Pro Max, iPhone 12 mini
iPhone SE (2nd Generation)

Note: Magnetic charging of cell phones is only applicable to the iPhone 16/15/14/13/12 series.

2. Smart Watch

Apple Watch Ultra / Ultra2 / SE / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 Series

3. Earbuds

AirPods 2 (with wireless case) / AirPods Pro / AirPods Pro 2 / AirPods 3 / AirPods 4 (compatible with A3059, A2968, A2700, A2566, A2190, A1938 AirPods case; Does not support AirPods charging case: A3058, A2897, A1602)

Samsung Galaxy Buds, Buds+, Buds Pro, Buds Live

Soundcore Liberty Air 2, Air 2 Pro, 2 Pro

Note: Compatible with all TWS (True Wireless Stereo) earphones supporting wireless charging.

Cautions

- 1.** Avoid pulling the power cord forcefully to prevent damage or detachment of the cord.
- 2.** Do not disassemble the product or expose it to fire or water, as this could cause a short circuit or leakage.
- 3.** Refrain from using the product in environments with excessive heat, humidity, or corrosive conditions, as this may lead to damage or leakage of the circuitry.
- 4.** Keep the product out of the reach of children to prevent potential

accidents.

5. When using fast charging, always use a qualified QC3.0 charging power adapter and fast charging cable. Using incompatible components may result in charging instability.

6. Avoid placing metal debris or magnetic cards on the charging board, as this could cause damage or abnormalities to the charger.

7. If the receiving coil or transmitting board overheats during use and causes charging to stop, remove the device, allow it to cool down, and then resume charging.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website **powerology.me/warranty** and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:
powerology.me/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at: **hey@powerology.me**

Website: **powerology.me**

Instagram: **powerology_official**

Facebook: **powerology.ME**